



PANEL CUT-OUT



Circuit

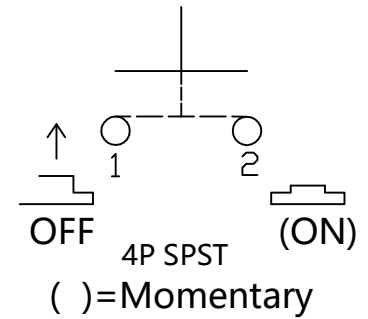

The Main Technology Performance

Item	Parameter
Rated voltage	6A 125VAC
Rated current	3A 250VAC
Insulated resistance	DC 500V 100MΩ min
Contact resistance	50mΩ Max
Dielectric strength	AC 1500V 1 minute
Operating Temperature	-25℃ ~ +85℃
Electrical Life	≥10000 Cycles

No.	Version	Layout drawing	Only For Reference
Design			
Check			
Process			
Standard			
Verified			
Approved			
		PBS13-507	BITUD ELECTRIC CO.,LTD