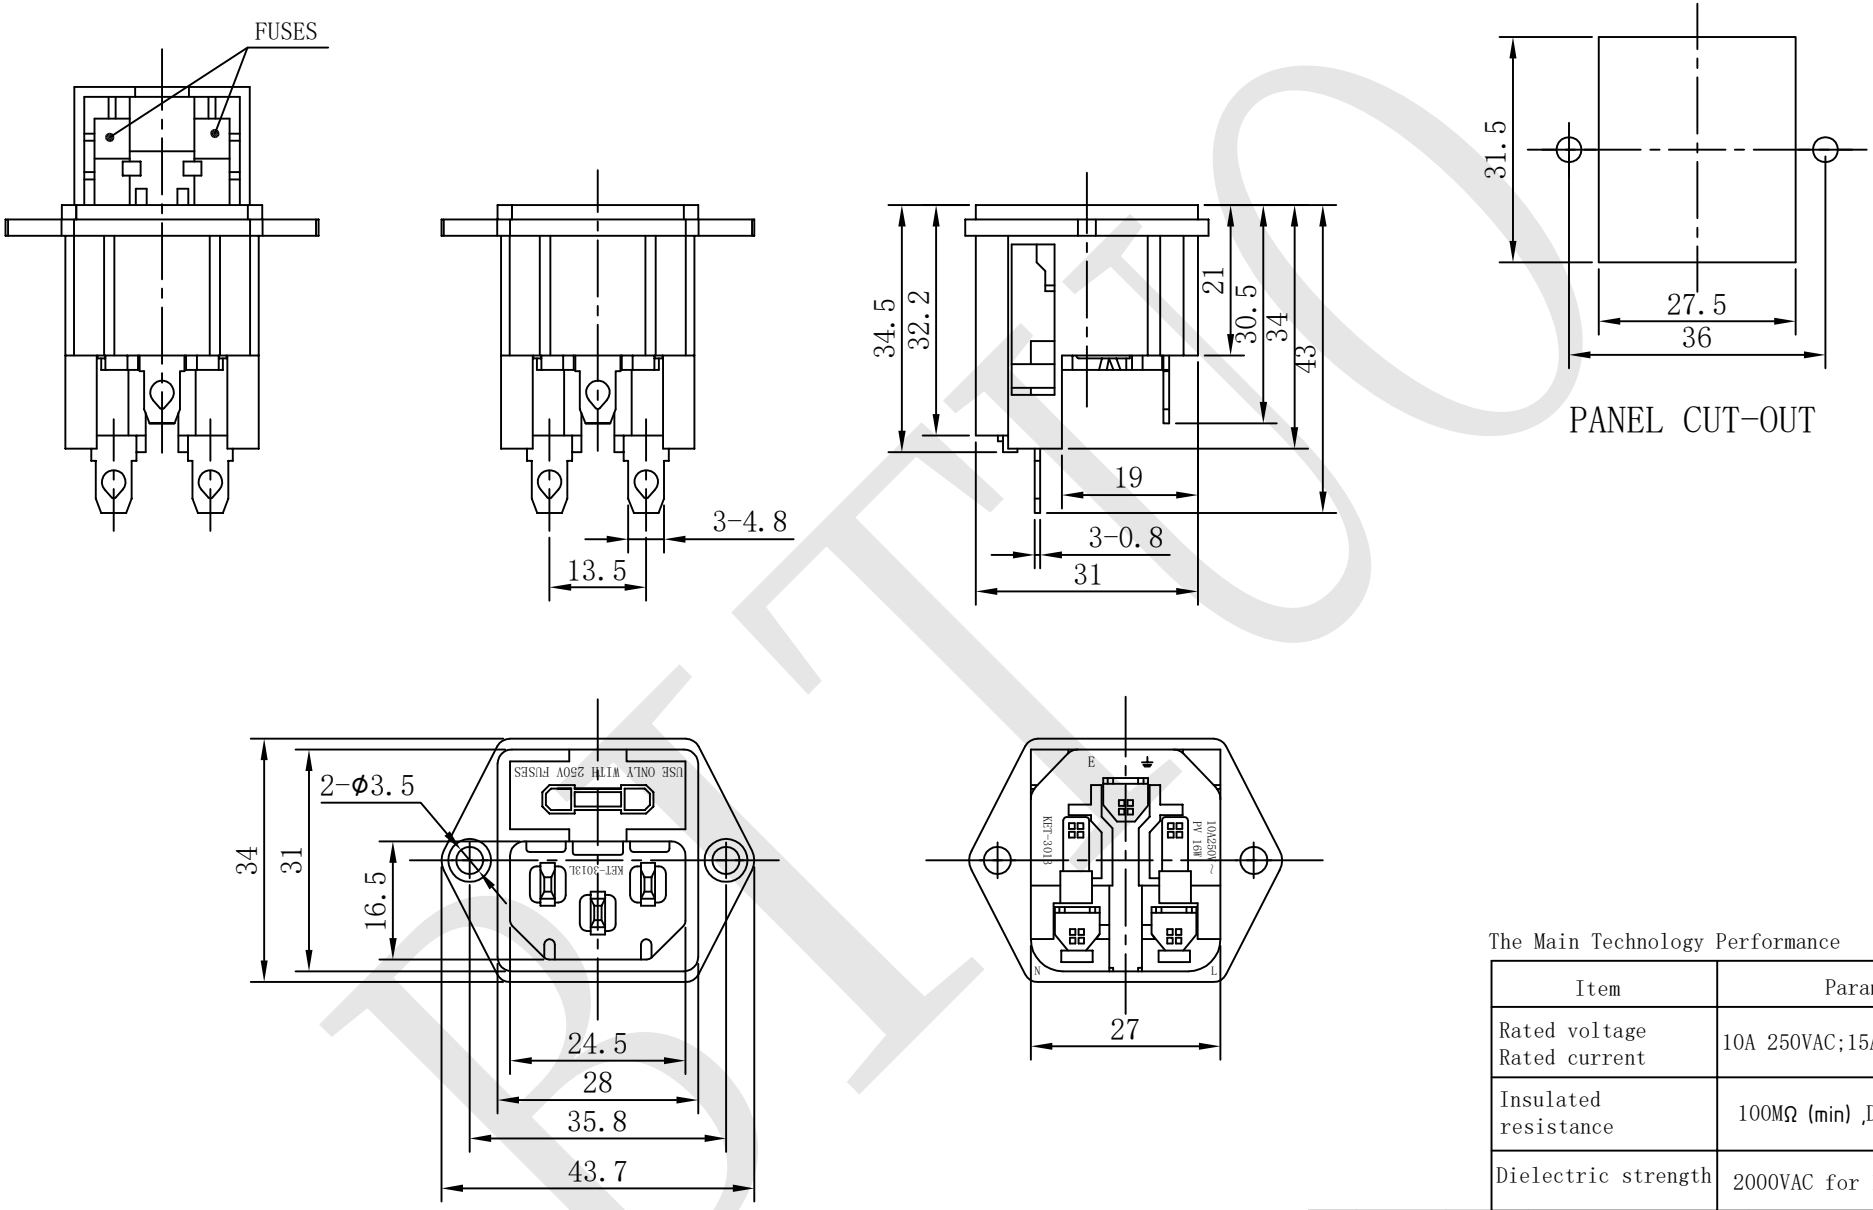

The Main Technology Performance

Item	Parameter
Rated voltage Rated current	10A 250VAC;15A 125VAC
Insulated resistance	100MΩ (min) ,DC 500V
Dielectric strength	2000VAC for 1 minute

No.		Version	Layout drawing	Only For Reference
Design				
Check				
Process				
Standard				
Verified			Model:BTP-3013L	BITUO ELECTRIC CO.,LTD
Approved				

BTO