

PRODUCT IMAGE	PRODUCT PARAMETERS	PRODUCT DRAWING
 <p>RBS-1</p>	<ul style="list-style-type: none"> Rating: 0.5A 125VAC/0.3A 250VAC Poles: 1, 2, 3, 4, 6 Position: 1 ~ 12 Shaft Option: Round or 18 Teeth Terminal Option: Solder or PCB 	
 <p>RS16</p>	<ul style="list-style-type: none"> Rating: 0.5A 125VAC/0.3A 250VAC Poles: 1, 2 Position: 4, 8 Shaft Option: Round or 18 Teeth Terminal Option: PCB 	
 <p>RT634-4</p>	<ul style="list-style-type: none"> Rating: 16A 250VAC Shaft Option: D Shaft Terminal Option: Solder 	
 <p>RTS-01</p>	<ul style="list-style-type: none"> Rating: 0.5A 125VAC/0.3A 250VAC Poles: 1, 2, 3, 4 Position: 1 ~ 12 Shaft Option: Round or 18 Teeth or D Terminal Option: Solder or PCB 	
 <p>3296W</p>	<ul style="list-style-type: none"> Resistance Range: 10Ω~2MΩ Resistance Value: 1K, 10K, 50K, etc Resistance Taper: A, B, C 	

PRODUCT IMAGE




3362P

PRODUCT PARAMETERS


- Resistance Range: 10Ω~2MΩ
- Resistance Value: 1K, 10K, 50K, etc
- Resistance Taper: A, B, C

PRODUCT DRAWING

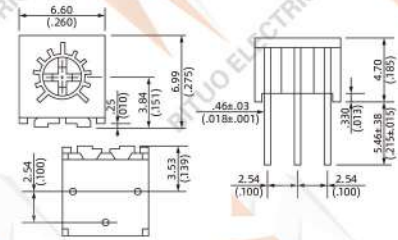


WH148-1A-2-18T

- Resistance Range: 1KΩ~1MΩ
- Resistance Value: 1K, 10K, 50K, etc
- Resistance Taper: A, B, C




WH148-1B-2-18T

- Resistance Range: 1KΩ~1MΩ
- Resistance Value: 1K, 10K, 50K, etc
- Resistance Taper: A, B, C

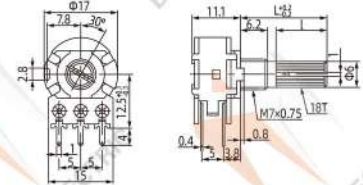

WH9011A-2-18T

- Resistance Range: 1KΩ~1MΩ
- Resistance Value: 1K, 10K, 50K, etc
- Resistance Taper: A, B, C

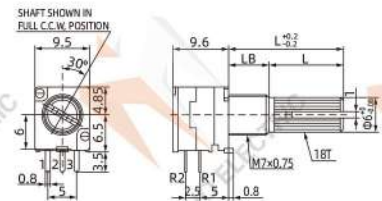

WH9011AK-1-18T

- Resistance Range: 1KΩ~1MΩ
- Resistance Value: 1K, 10K, 50K, etc
- Resistance Taper: A, B, C

